OPSC21 Specification



Overview

Decenta OPSC21 is widely used in various scenarios such as education, conference IWB and digital signage.

- 13th/12th Gen Intel[®] Core[™] i7/i5/i3 Processor.
- 2x DDR5 4800MHz SO-DIMM, Dual channel, Max.64G.
- Support Wi-Fi and Bluetooth.
- Support M.2 SSD, with SATA/PCIe mode.
- Rich interfaces with 3x USB3.0, 3x USB2.0, 1x USB Type-C.
- Supports high resolution of HDMI[®] out, up to 4K@30Hz.
- Support for TPM encryption.


I/O Overview





Specifications

Model			S22-RPLS-OPSC21
			13 th /12 th Gen Intel [®] Core™ i7/i5/i3 Processor
CPU			-12100/13100/12400/13400/12700/13700
Memory	Туре		2x DDR5 4800MHz SO-DIMM Memory
	Capacity		Max.64GB
Graphic	c Controller		Intel [®] UHD Graphics
Network	Ethernet	Controller	Realtek 8111H,Colay intel i219
		Connector	1Gb RJ45
	Wi-Fi		1x M.2 B-Key 2230 Slot with PCIe X1 & USB 2.0 Signal, WIFI 6E/BT 5.2 - Default WIFI 5/BT 5.0
Storage	SSD/HDD		M.2 SATA/PCIe NVMe, optional 2.5" HDD
I/O	Front	LAN	1
		USB 3.0	3
		USB 2.0	3
		USB Type-C	1
		HDMI [®] Out	1, with resolution of 4K@30Hz
		DP	1
		Headphone	1
		Mic In	1
		LED	3(P_LED, Power LED, HDD LED)
		Power Button	1
		Reset button	1
		Antenna	2
		Kensingdon keyhole	1
	Rear	80Pin Connector	1
Environment	Temperature	Operating	0°C-45°C
		Storage	-20°C-70°C
	Humidity	Operating	10%~90% non-condensing
		Storage	5%~95% non-condensing
Noise Value			Below 38db
Power			DC 19V
OS			Windows/Linux/UOS
Bios			Insyde BIOS
Dimensions			195mm x 180mm x 30/42**mm
Remark			** 42mm height with handle on Chassis

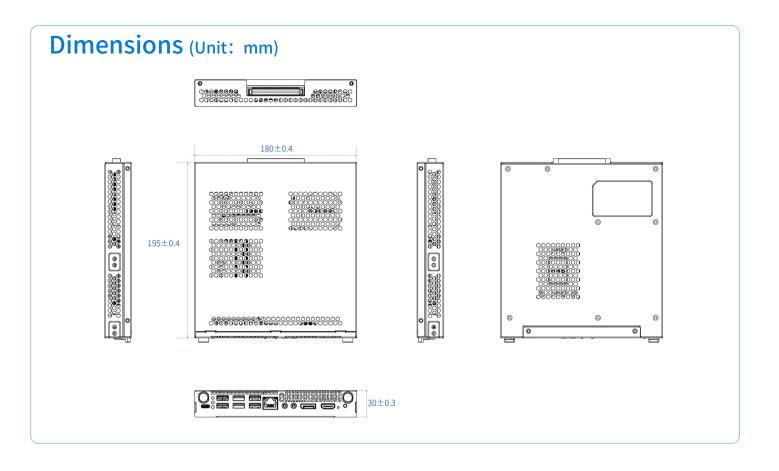

*Specifications and information contained in this document are furnished for informational use only, and are subject to change at any time without notice, and should not be construed as a commitment by Decenta.