

# OPSC22 Specification



## Overview

Decenta OPSC22 is widely used in various scenarios such as education, conference IWB and digital signage.

- 11<sup>th</sup> Gen Intel® i7/i5/i3 Core™ processor.
- 2x DDR4 3200MHz SO-DIMM, Dual channel, Max.64G.
- Support Wi-Fi and Bluetooth.
- support M.2 SSD, with SATA/PCIe mode.
- Rich interfaces with 4x USB3.0, 2x USB2.0, 1x USB Type-C.
- Support high resolution of HDMI® out, up to 4K@30Hz.
- Support for TPM encryption.




## I/O Overview



# Specifications

Model		S22-TGLU-OPSC22	
CPU		11 <sup>th</sup> Intel® i7/i5/i3 Core™ processor	
Memory	Type	2x DDR4-3200MHz-SO-DIMM	
	Capacity	Max.64GB	
Network	Wi-Fi	1xM.2 Key-E 2230,Support Wi-Fi 6E+Bluetooth 5.2	
Storage	SSD/HDD	1x M.2 Key-M 2242/2280 Slot, Support SATA & PCIe mode	
I/O	Front	LAN	1
		USB 3.0	4
		USB 2.0	2
		USB Type-C	1
		HDMI® Out	1, with resolution of 4K@30Hz
		DP	1
		Headphone	1
		Mic In	1
		LED	3(P_LED, Power LED, HDD LED)
		Power Button	1
		Reset button	1
		Antenna	2
	Kensington keyhole	1	
	Rear	80Pin Connector	1, with HDMI® Out of resolution of 4K@60Hz
Fan Header		1x 4Pin CPU Fan header	
Environment	Temperature	Operating	0°C-45°C
		Storage	-20°C-70°C
	Humidity	Operating	10%~90% non-condensing
		Storage	5%~95% non-condensing
Noise Value		Below 38db	
Power		DC 19V/5A	
OS		Win 10/Win 11	
Bios		Insyde BIOS	
Dimensions		195mm x 180mm x 30/42**mm	
Remark		** 42mm height with handle on Chassis	

## Dimensions (Unit: mm)

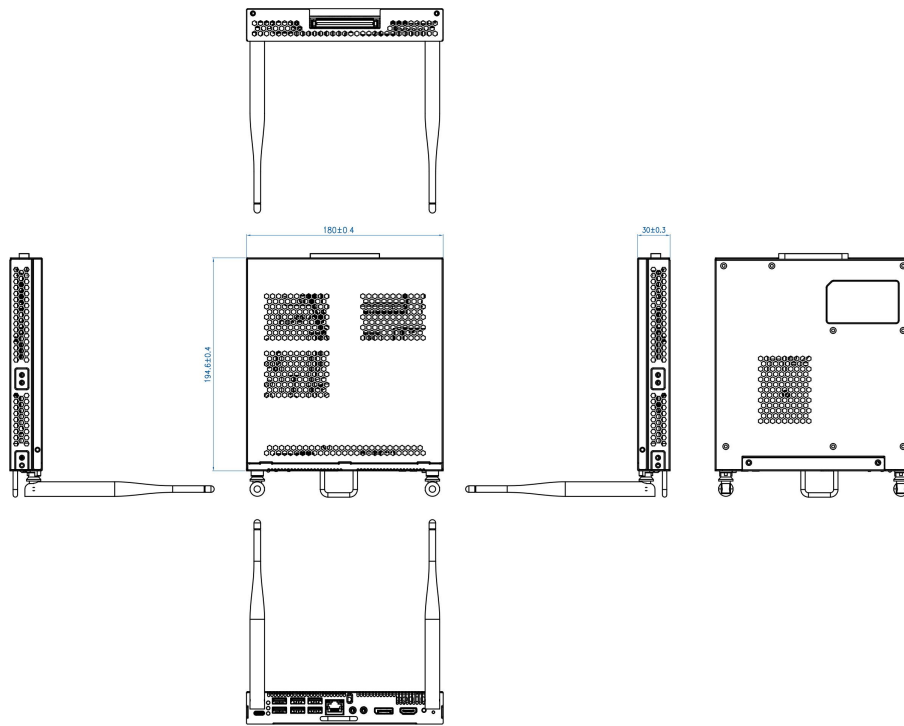

\*Specifications and information contained in this document are furnished for informational use only, and are subject to change at any time without notice, and should not be construed as a commitment by Decenta.