


ATX02 Specification

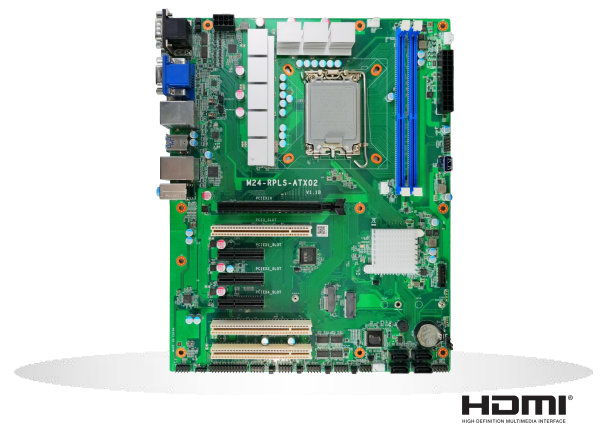


Overview

Decenta ATX02 stand out for standard size, multiple expansion slots, rich I/O interfaces, and powerful power management. It performs well in industrial control and automation applications that require high-performance computing and scalability, such as Industrial automation, embedded systems, communication equipment, industrial servers, etc.

- Support Intel® 15th/14th/13th/12th gen Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor
- Intel® H610 Chipset
- Support 2x DDR4 3200MT/s UDIMM Memory, Dual Channel up to 64GB
- Rich display interfaces with VGA/HDMI®/DP
- 1x M.2 E-Key 2230 Slot for Wi-Fi 6E & BT 5.3
- 1x M.2 M-Key 2242/2280 Slot for storage
- 1x PCIe 4.0 X16 Slot, 2x PCIe 3.0 X4 Slots(X2 Signal), 1x PCIe 3.0 X4 Slot(X1 Signal), 3x PCI Slots
- Support TPM 2.0, Watchdog

I/O Overview

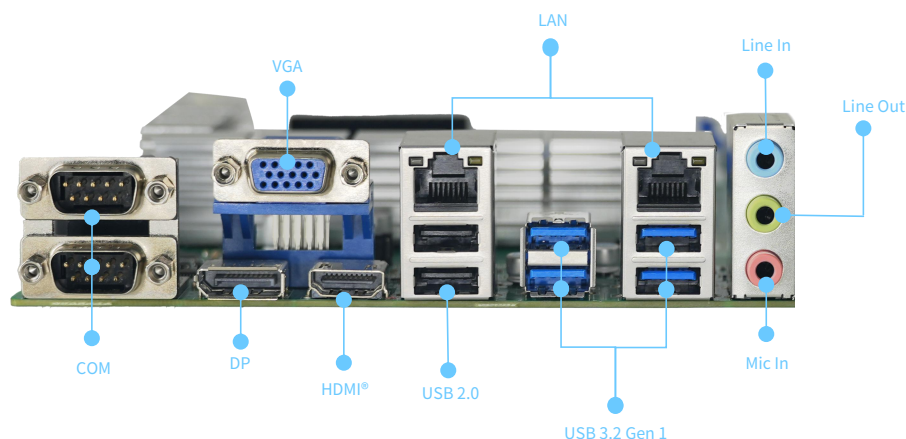


Specifications

Model			M24-RPLS-ATX02	
SKU			SKU1(Default)	SKU2
Processor			Support Intel® 15 th /14 th /13 th /12 th gen Core™ i9/i7/i5/i3 & Pentium®/Celeron® Processor, TDP 65W	
Chipset			Intel® H610, TDP 6W	
Power Phase			6+1+1Phase-switching voltage regulator *Monitors for CPU Cores, Chipset Voltages, Memory	
Memory	Type		2x DDR4 3200MT/s UDIMM Memory, Dual Channel	
	Capacity		Max.64GB	
Graphic	Controller		Intel® UHD Graphics	
	Connector		VGA/HDMI®/DP	
Network	Ethernet	Controller	1x Intel® i219V & 1x Intel® i210	
		Connector	1GbE RJ45	
	Wi-Fi		1x M.2 E-Key 2230 Slot for Wi-Fi 6E & BT 5.3, Support CNVi signal	1x M.2 E-Key 2230 Slot for Wi-Fi 6E & BT 5.3, Support PCIe 3.0 & CNVi signal
Audio	Controller		Realtek ALC897	
Storage	SSD		1x M.2 M-Key 2242/2280 Slot, Support PCIe 3.0(NVMe) mode	1x M.2 M-Key 2242/2280 Slot, Support SATA mode
	SATA		4	3
Expansion Slot	PCIe		1x PCIe 4.0 X16 Slot 2x PCIe 3.0 X4 Slots(X2 Signal) 1x PCIe 3.0 X4 Slot(X1 Signal)	1x PCIe 4.0 X16 Slot 1x PCIe 3.0 X4 Slot(X4 Signal) 1x PCIe 3.0 X4 Slot(X1 Signal)
	PCI		3	
I/O	Rear	LAN	2x RJ45	
		VGA	1, With resolution of 1920 x 1200 @60Hz	
		HDMI®	1, With resolution of 4K@30Hz	
		DP	1, With resolution of 4K@60Hz	
		USB 3.2 Gen 1	4	
		USB 2.0	2	
		COM	2x DB9 (RS232/422/485)	
		Mic in	1	
		Line in	1	
		Line out	1	
	Internal	LED	1x P_LED_Green(Solid Green)	
		COM	4x RS232	
		USB 2.0	2 via (10-1)Pin Header 1 via Connector for security dongle	
		LPT/GPIO Header	1x 2*13(26-1)Pin header/ 8-bit(4 in, 4 out), Default GPIO 3.3V	
		Power	1x 24Pin ATX + 1x 8Pin ATX	
		CPU Fan	1x 4Pin Header	
		Chassis Fan	3x 4Pin Chassis Fan Headers	
		Chassis Intrusion Header	1x (4-1)Pin Header	
		ATX/AT Mode Jumper	1	
		AAFP	1x 2*5(10-1) Pin Front Panel Audio Header	
		System Panel Header	1x 2*5 (10-1) Pin Header	
		Buzzer	1	
		Speaker	1x 4Pin Header, Reserved	

Specifications

Model			M24-RPLS-ATX02
I/O	Internal	Watchdog	1x 3Pin Header, Reserved
		SPDIF_Out Header	1x 4Pin Header
		PS/2 KB/MS Header	1x 2*4(8)Pin Header
		COM Setting jumper(5V/12V/RI)	6x 6Pin Jumper
		COM(RS232/422/485) Select Jumper	2x 6pin Jumper
		RS485/422 Termination Select Jumper	2x 3Pin Jumper
		Power On Wafer	1x 2Pin Header, Reserved
		SMBus Wafer	1x 4Pin Header, Reserved
		CLRTC	1x 3Pin Header
		TPM	1x 2*10(20-1)Pin Header
		PCI CLK Select Jumper	1x 66MHz Disbale/Enable Select Jumper
Feature	dTPM 2.0		V2.0
	Watchdog Timer		Programmable 1 ~ 255 sec
Environment	Temperature	Operating	0 ~ 60 °C
		Non-operating	-40 ~ 85 °C
	Humidity	Operating	95%@ 40 °C RH non-condensing
		Non-operating	95% @ 60 °C RH non-condensing
Power			1x 24Pin ATX + 1x 8Pin ATX
OS			Win 10/Win 11/Linux(ubuntu)
Bios			Insyde
Dimensions			305mm x 244mm
Accessory			2x M.2 Screws 1x I/O Shield 2x 430mm SATA Cables

Dimensions (Unit: mm)

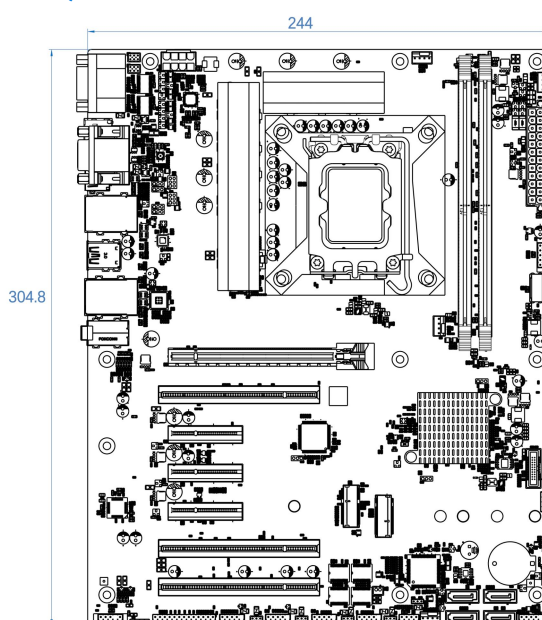

*Specifications and information contained in this document are furnished for informational use only, and are subject to change at any time without notice, and should not be construed as a commitment by Decenta.