

BOX26 产品规格书





产品概述

德晟达新一代智能终端BOX26，凭借4K超清显示和卓越性能，在会议场景中获得了广泛应用。其超强的稳定性和设备兼容性，能够满足各种场景下的用户需求。同时，它还可应用于医疗、教育、零售等其他场景。



- 支持第十三代和第十二代英特尔®酷睿™i7/i5/i3，英特尔®奔腾™和英特尔®赛扬™处理器
- 板载LPDDR5双通道内存，频率高达4800MT/s
- 最高支持四路HDMI® 4K输出，支持同步异显，轻松实现多屏互动与多样展示
- 最高支持两路HDMI® 4K输入，低延时设计确保了音视频同步传输，让您畅享视听盛宴
- 支持红外功能，选配专属遥控器，轻松实现远程便捷操控
- 德晟达自定义扩展接口，支持50米网线下的音视频和数据传输

接口示意图

■ SKU1

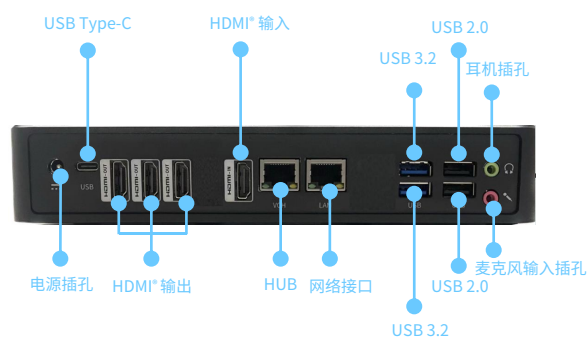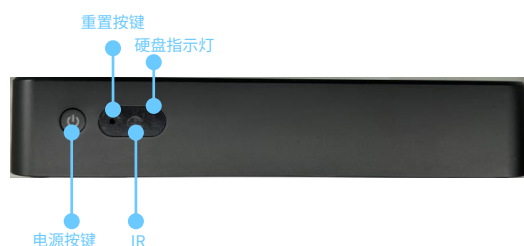

■ SKU2

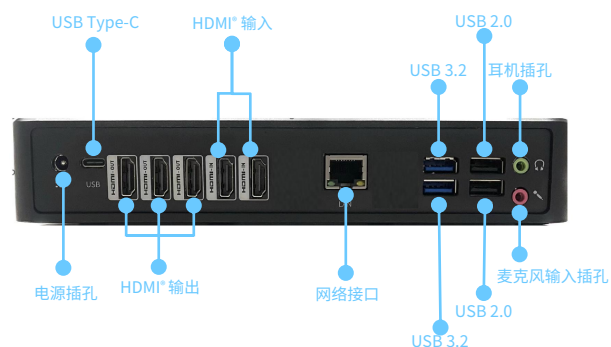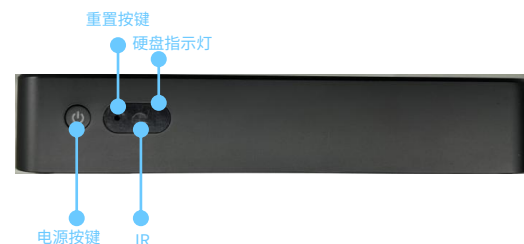

产品规格

Model		S23-RPLP-BOX26		
SKU		SKU 1	SKU 2	
Processor		13th/12th Gen Intel® Core™ i7/i5/i3 Processor, Intel® Pentium™/ Celeron™ Processor, TDP 28W		
Memory	Type	On board LPDDR5 Memory, Dual channel, Up to 4800MT/s		
	Capacity	Max.64GB		
Graphic	Controller	Intel® Iris® Xe graphic/Intel® UHD graphic *		
	Connector	HDMI®		
Network	Ethernet	Controller	Intel® i219V/Realtek 8111H	
		Connector	1GbE RJ45	
	WIFI	1x M.2 E-Key 2230 slot for WIFI 6E + BT 5.3, Support PCIe 3.0 & CNVi Signal		
Audio	Controller	HS-100B		
Storage	SSD	1x M.2 M-Key 2280/2242 slot, Support PCIe 3.0 X4 & SATA 3.0 mode		
I/O	Front	Power Button	1, With LED_White; Power on: Solid White, S3: Blinking White, S4/S5: Off	
		Recovery Button	1	
		LED	1(HDD_LED_Green; Not transmitting data: Off, Transmitting data: Blinking Green)	
		IR	1	
	Rear	LAN	1	
		HUB	1x RJ45, With resolution of 1080P	/
		HDMI® Out	3, With resolution of 4K@60Hz, CEC Support	
		HDMI® In	1, With resolution of 4K@60Hz	2, With resolution of 4K@60Hz
		USB Type-C	1(Data only)	
		USB 3.2	2x USB 3.2 Gen 1	
		USB 2.0	2	
		Headphone	1	
		Mic in	1	
		DC Jack	1	
	Internal	Antenna	2	
		COM Header	2	
		USB 2.0	1x 9Pin Header, Reserved	
		Power	1x 4Pin ATX Connector	
		Fan	1x 4Pin Header	
	Cooling System		Fan & Heatsink	
Environment	Temperature	Operating	-10°C-45°C	
		Non-operating	-20°C-70°C	
	Humidity	Operating	10%~90% RH non-condensing	
		Non-operating	5%~95% RH non-condensing	

产品规格

Model		S23-RPLP-BOX26
Feature	dTPM	V2.0, Reserved
	One click system restore function	Y
Noise Value		Below 34dB@1m
Power		DC 12~19V
OS		Win 11/ Win 10
Bios		Insyde
Material		Plastic
Dimensions(mm) (Length x Width x Height)		225 × 142.2 × 40(mm)
Accessory		Remote-control unit, Optional
Remark		*Depend on CPU model


选配表

Module	Model Name	Wi-Fi Ver.	Bluetooth Ver.	Host Interface
WIFI Module	AX 101	Wi-Fi 6	BT 5.2	CNVio2
	AX 210	Wi-Fi 6E	BT 5.3	PCIe, USB
	AX 211	Wi-Fi 6E	BT 5.3	CNVio2

可选配置

Module	Model Name
COM	1x RJ45, Co-lay with LAN
LAN	Max.2, One is co-lay with COM
HUB	1, Only can work with one HDMI® In at the same time
HDMI® Out	Max.4, One is co-lay with HDMI® In
HDMI® In	Max.2, One is Co-lay with HDMI® Out

产品尺寸 (单位: mm)

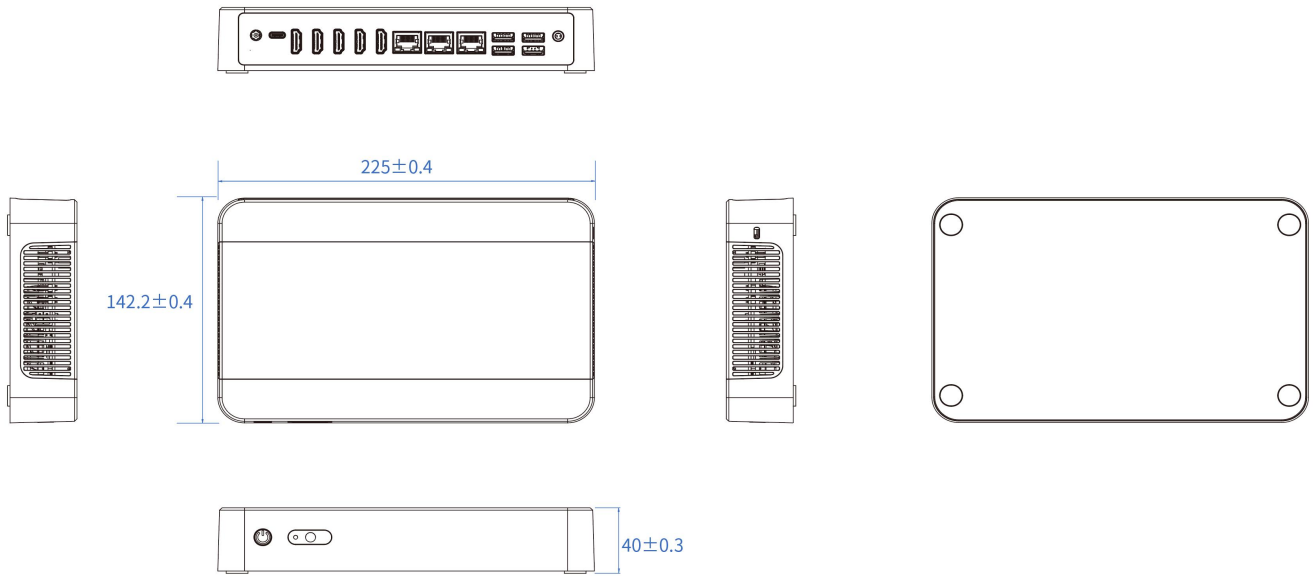

*本文件中包含的规格和信息仅供参考，可随时更改，恕不另行通知，请予以关注。